

**For transferring steel beams and attaching tackle eye**

- Available in capacities of 2 thru 25 metric tons.
- Wide variety of jaw openings available: 2.95" to 40.16".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Manufactured by an ISO 9001 facility.
- All sizes are RFID EQUIPPED.

**IPTK**  
 This IPTK series beam clamp is suitable for use as a temporary tackle eye for a beam.

**IPTKW**  
 The IPTKW series beam clamp is suitable for use as a temporary tackle eye for a beam.

**IPTKU**  
 The IPTKU series beam clamp has an improved hinged hoisting eye that increases the loading angles and an optional new "Double Locking Device".


**IPTKUM**  
 This anchor clamp is suitable as an anchor device for one person, with a personal fall arrest (sherdised and with double locking) system.




**IPTK: with hoisting eye / IPTKW: without hoisting eye**  
**IPTKU: with hinged hoisting eye / IPTKUD: with double locking device**  
**IPTKUM: Suitable as anchor device for personnel fall arrest equipment**

Model	Working Load Limit (t)*	IPTK Stock No.	Weight Each (lbs.)	Dimensions (in.)							
				Jaw A	C	D	E	F	H	J	K
IPTK	2	2700996	13.2	2.95 - 7.48	A + 3.13	4.92	2.95	-	0.98	-	0.79
IPTK	3	2700997	14.3	2.95 - 7.48	A + 3.13	4.92	2.95	-	0.98	-	0.79
IPTK	4	2700998	18.7	5.91 - 11.02	A + 4.00	4.92	2.95	-	1.38	-	0.79
IPTK	5	2700994	24.3	4.72 - 13.78	A + 7.67	4.92	2.95	-	1.57	-	0.79
IPTK	25	2702999	496.0	17.72 - 40.16	A + 8.66	19.69	4.92	-	2.99	-	1.77
<b>Without Hoisting Eye</b>											
IPTKW	2	2700966	8.82	3.00 - 7.50	A + 3.13	4.92	-	1.10	0.98	-	-
IPTKW	3	2700967	9.92	3.00 - 7.50	A + 3.13	4.92	-	1.10	0.98	-	-
IPTKW	4	2700968	13.9	5.88 - 11.25	A + 4.00	4.92	-	1.30	1.38	-	-
IPTKW	5	2700969	19.4	4.75 - 13.75	A + 7.67	4.92	-	1.30	1.57	-	-
<b>With Improved Hinged Hoisting Eye</b>											
IPTKU	2	2707996	12.6	3.00 - 7.50	A + 3.94	A + 3.94	4.76	2.99	0.87	3.90	0.75
IPTKU	3	2707997	14.1	3.00 - 7.50	A + 3.94	A + 3.94	4.76	3.50	0.87	4.80	0.87
IPTKU	4	2707998	26.7	4.75 - 11.25	A + 5.91	A + 5.91	5.51	3.50	1.57	4.80	0.87
IPTKU	5	2707994	32.0	4.75 - 13.75	A + 6.89	A + 6.89	5.51	3.50	1.57	4.80	0.87
IPTKU	10	2707970	90.4	7.88 - 18.00	A + 11.81	A + 11.81	7.87	4.13	2.36	5.98	1.02
<b>Suitable as anchor device for personnel fall arrest equipment - standard according to EN 795</b>											
IPTKUM	1	2709991	13.2	3.00 - 7.50	A + 3.94	6.50	2.99	0.87	3.90	0.75	0.75
<b>With Optional Double Locking Device</b>											
IPTKUD	2	2709996	13.2	3.00 - 7.50	A + 3.94	6.50	2.99	0.87	3.90	0.75	0.75
IPTKUD	3	2709993	14.6	3.00 - 7.50	A + 3.94	6.50	3.50	0.87	4.80	0.87	0.87
IPTKUD	4	2709995	27.1	4.75 - 11.25	A + 5.91	7.28	3.50	1.57	4.80	0.87	0.87
IPTKUD	5	2709994	33.7	4.75 - 13.75	A + 6.89	7.28	3.50	1.57	4.80	0.87	0.87
IPTKUD	10	2709970	94.8	7.88 - 18.00	A + 11.81	8.46	4.13	2.36	5.98	1.02	1.02


\* Design Factor based on EN 13155 and ASME B30.20.

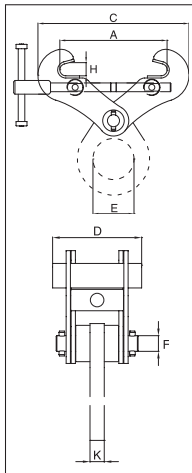


IPTK/IPTKW

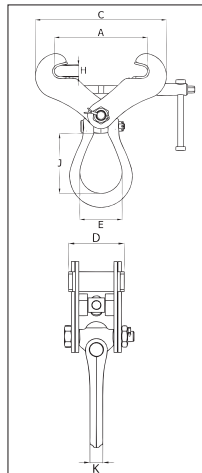

IPTKU(D)(M)

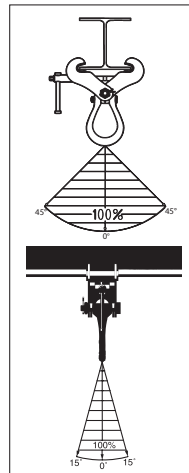

IPTKU(D)

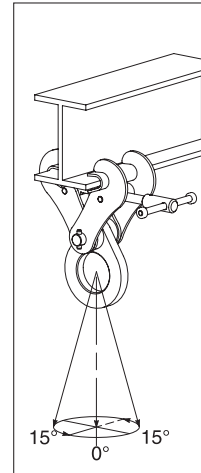

IPTK