




IPHOZ

The IPHOZ horizontal lifting clamp is to be used for lifting and transferring, in the horizontal position, of thin sheet and other materials that will sag or bend when lifted. These clamps must be used in pairs or more.

For horizontal lifting and transfer

- Available in capacities of .75 thru 15 metric tons.
- Wide variety of jaw openings available: 0 to 60mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Manufactured by an ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.

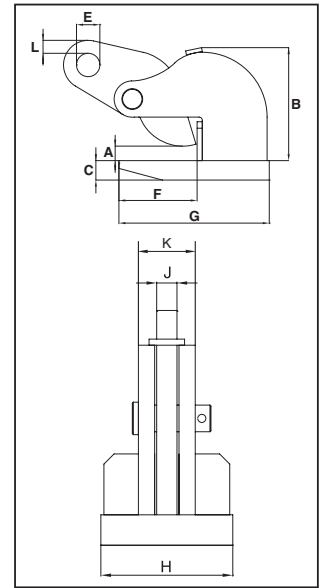

Load Rated

Model IPHOZ: Jaw opening range 0 to 60mm

Model	Working Load Limit (Per Pair) (t)*	IPHOZ Stock No.	Weight Each (kg)	Dimensions (mm)									
				Jaw A	B	C	E	F	G	H	J	K	L
IPHOZ	0.75	2705401	3.0	0 - 30	94	16	16	70	118	81	12	31	12
IPHOZ	1.5	2705402	5.5	0 - 45	133	16	22	125	192	100	16	36	12
IPHOZ	3	2705403	8.0	0 - 45	137	20	26	125	200	120	20	48	10
IPHOZ	4.5	2705404	8.5	0 - 45	138	25	30	126	220	120	20	50	10
IPHOZ	6	2705405	16.0	0 - 60	171	30	36	135	235	130	20	56	20
IPHOZ	9	2705406	20.0	0 - 60	211	30	43	166	276	160	25	62	20
IPHOZ	12	2705407	28.0	0 - 60	217	40	47	168	294	190	25	62	19
IPHOZ	15	2705408	36.0	0 - 60	220	40	47	183	317	250	25	62	22

* Design Factor based on EN 13155 and ASME B30.20.

